

abv

ARAZNET MMC



RƏSMİ DİSTRİBUTOR

HIKVISION

TƏHLÜKƏSİZLİK SİSTEMLƏRİ

www.abv.az



Analoq Sistem

IP Sistem

Tandem Vu

PTZ



ANALOQ

Sistemi



HIKVISION



43,5
m

DS-2CE16D0T-EXIF

- 2MP
- 2.8 mm, 3.6 mm Fixed Lens
- Up to 20 m
- 0.02 Lux
- BLC;Global;DWDR,2D DNR
- Switchable TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- IP67
- Metal



55
m

DS-2CE16D0T-ITFS

- 2MP coaxial audio camera
- 2.8 mm, 3.6 mm,
- Up to 30 m
- 0.01 Lux @ (F2.0, AGC ON), 0 Lux with IR
- Digital WDR
- 12 VDC $\pm$ 25%
- Switchable TVI/AHD/CVI/CVBS
- IP67
- Metal



95
m

DS-2CE16D3T-IT3F

- 2 MP CMOS
- Fixed focal lens, 2.8 mm
- Up to 50 m
- BLC;HLC,3D DNR Power
- 12 VDC $\pm$ 25%, max. 5.6 W
- 4 in 1 (TVI/AHD/CVI/CVBS)
- Metal
- IP67



146



DS-2CE16D8T-IT3ZF

- 2 MP CMOS
- 2.7 mm to 13.5 mm motorized,
- 0.003 Lux@ (F1.87, AGC ON)
- BLC, HLC, White Balance ATW/MANUAL
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Up to 80 m
- Metal
- IP67



65



DS-2CE17D0T-IT3

- 2 MP CMOS
- 2.8 mm, 3.6 mm, fixed lens
- 0.01 Lux@ (F1.2, AGC ON), 0 Lux with IR
- Digital WDR DWDR/BLC/HLC/Global
- Up to 40 m
- 12 VDC $\pm$ 25%
- Plastic
- IP67



81



DS-2CE17D0T-IT5

- 2 MP CMOS
- Lens: 3.6 mm
- Up to 80 m
- 0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
- WDR: Digital WDR
- 12 VDC $\pm$ 25%
- Plastic
- IP67



93



DS-2CE17D0T-IT3FS

- 2 MP CMOS
- 2.8 mm, fixed focal lens
- Up to 40 m
- DWDR; BLC; HLC; Global, 2D DNR
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%,
- IP67



117



DS-2CE19D3T-IT3ZF

- 2MP
- 2.7 mm to 13.5 mm
- Up to 70 m
- 0.005 Lux@(F1.2, AGC ON), 0 Lux with IR
- ATW/MWBHigh/Medium/Low
- Switchable TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- IP67
- Metal

NEW



118



DS-2CE19D3T-AIT3ZF

- 2MP
- 2.7 mm to 13.5 mm
- Up to 70 m
- 0.005 Lux@(F1.6, AGC ON)
- 3D DNR,
- ATW/MWBHigh/Medium/Low
- Switchable TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- IP67
- Metal

NEW



71



DS-2CE17D0T-IT5F

- 2MP
- Fixed focal lens, 3.6 mm
- Up to 80 m
- 0.01 Lux
- WDR, BLC, HLC, Global, HLS
- TVI/AHD/CVI/CVBS
- Active strobe light and audio alarm
- Plastik
- IP67

72
m**DS-2CE10DF3T-F**

- 2 MP CMOS
- 2.8 mm, 3.6 mm, fixed lens
- 0.0005 Lux@,0 Lux with white light ON
- 24/7 Color Imaging
- 3D DNR/2D DNR
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Up to 20 m
- Metal
- IP67

90
m**DS-2CE12DF3T-F**

- 2 MP CMOS
- 3.6 mm, fixed lens
- 24/7 Color Imaging
- 0.0005 Lux, 0 Lux with white light ON
- TVI/AHD/CVI/CVBS
- BLC, HLC, Global, HLS
- Up to 40 m
- 12 VDC $\pm$ 25%
- IP67

141
m**DS-2CE12DF3T-PIRXOS**

- 2MP
- Fixed focal lens, 3.6 mm
- Up to 40 m
- 0.0005 Lux
- WDR, BLC, HLC, Global, HLS
- Mikrofon Əlavə Etmək İmkani
- Active strobe light and audio alarm
- Plastik
- IP67

130
m**DS-2CE12KF3T-L**

- 2MP
- Fixed focal lens, 3.6 mm
- Up to 40 m
- 0.0005 Lux
- WDR, BLC, HLC, Global, HLS
- 3D DNR/2D DNR
- 12 VDC $\pm$ 25%
- Metal
- IP67



40



DS-2CE56D0T-IRP

- 2MP
- 2.8 mm, 3.6 mm Fixed Lens
- Up to 20 m
- 0.01Lux
- BLC;HLC;Digital WDR
- Power Supply 12 VDC $\pm$ 25%
- Plastik



51



DS-2CE56D0T-IRM

- 2MP
- 2.8 mm, 3.6 mm,
- Up to 25 m
- 0.01 Lux
- Digital WDR BLC, HLC
- 12 VDC $\pm$ 25%
- Switchable TVI/AHD/CVI/CVBS
- IP67
- Metal



71



DS-2CE56D0T-IT3E

- 2MP
- Fixed focal lens, 2.8 mm
- Up to 40 m
- 0.01 Lux
- DWDR,BLC
- Power 12 VDC $\pm$ 30%/PoC.af, max. 4 W
- Plastik
- IP67



105



DS-2CE56D8T-IRS

- 2 MP CMOS
- Fixed focal lens, 2.8 mm
- 0.005 Lux
- Up to 20 m
- WDR;BLC
- 12 VDC $\pm$ 30%, Max. 5 W
- 1 CVBS output (75 Ω /BNC)
- Metal və Plastik
- IP67



64



DS-2CE70D0T-ITMF

- 2 MP CMOS
- 0.01 Lux@
- 2.8 mm fixed lens
- Digital WDR
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Up to 20 m
- Metal
- IP67



51



DS-2CE76D0T-ITPFS

- 2 MP CMOS
- 2.8 mm fixed lens
- 0.01 Lux@
- Mikrofon
- Digital WDR
- TVI/AHD/CVI/CVBS
- Up to 20 m
- 12 VDC $\pm$ 25%
- Plastic



67



DS-2CE76D3T-ITMF

- 2 MP CMOS
- Lens: 2,8mm
- Up to 30 m
- 0.005 Lux
- WDR;BLC;HLC
- 12 VDC $\pm$ 25%
- Metal
- IP67



125



DS-2CE79D3T-IT3ZF

- 2 MP CMOS
- 2.7 mm to 13.5 mm
- Up to 70 m
- BLC, HLC 3D DNR
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%,
- IP67

NEW



41



DS-2CE76D0T-EXIMF

- 2MP
- 2.8 mm, Fixed Lens
- Up to 20 m
- 0.001 Lux
- DWDR, BLC, HLC, Global
- TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- Metal



66

**DS-2CE70DF0T-PF**

- 2MP
- 2.8 mm, Fixed Lens
- Up to 20 m
- 0.001 Lux
- DWDR, BLC, HLC, Global
- TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- Plastik



100

**DS-2CE72DF3T-FS**

- 2 MP CMOS
- 2.8 mm fixed lens
- 0.0005 Lux
- WDR, BLC, HLC, Global, HLS
- TVI/AHD/CVI/CVBS
- Up to 40 m
- Mikrofon Əlavə Etmək imkanı
- 12 VDC $\pm$ 25%
- Plastic
- IP67



132

**DS-2CE72DF3T-PIRXOS**

- 2 MP CMOS
- Fixed focal lens, 2.8 m
- 0.0005 Lux
- Up to 20 m
- WDR, BLC, HLC, Global, HLS
- 12 VDC $\pm$ 30%, Max. 5 W
- Mikrofon
- Alarm çıxış
- IP67



71



DS-2CE16H0T-ITF

- 5 MP CMOS
- 0.01 Lux
- 2.8 mm, 3.6 mm fixed lens
- Digital WDR ,BLC,ATW/MWB
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Up to 20 m
- Metal
- IP67



81



DS-2CE17H0T-IT3F

- 5 MP CMOS
- 2.8 mm, 3.6 mm fixed lens
- 0.01 Lux@
- DWDR/BLC/HLC/Global
- TVI/AHD/CVI/CVBS
- Up to 40 m
- 12 VDC $\pm$ 25%
- Plastic
- IP67



86



DS-2CE17H0T-IT3FS

- 5 MP CMOS
- 2.8 mm, 3.6 mm fixed lens
- Up to 40 m
- 0.01 Lux
- Mikrofon Əlavə etmək imkanı
- DWDR;BLC;HLC;Global
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- IP67



94



DS-2CE17H0T-IT5F

- 5 MP CMOS
- 3.6 mm fixed lens
- Up to 80 m
- DWDR/BLC/HLC/Global
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%,
- IP67



95



DS-2CE16H0T-IT5F

- 5 MP CMOS
- 6 mm, Fixed Lens
- Up to 80 m
- 0.01 Lux
- DWDR, BLC,
- TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- Metal
- IP67



139



DS-2CE16H0T-IT3ZF

- 5 MP CMOS
- 2.7 mm to 13.5 mm varifocal lens
- 0.01 Lux
- WDR, BLC,
- TVI/AHD/CVI/CVBS
- Up to 40 m
- 12 VDC $\pm$ 15% Plastic
- Metal
- IP67



156



DS-2CE19H0T-AIT3ZF

- 5 MP CMOS
- 2.7 mm to 13.5 mm varifocal lens
- Up to 40m
- 0.01 Lux
- BLC;HLC;Global;DWDR
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 15%
- Metal
- IP67

126
⌂**DS-2CE10HFT-F**

- 5 MP CMOS
- 0.0005 Lux
- 3.6 mm fixed lens
- BLC, HLC
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Up to 20 m
- Metal
- IP67

126
⌂**DS-2CE10HFT-F28**

- 5 MP CMOS
- 2.8 mm, fixed lens
- 0.0005 Lux
- BLC, HLC
- TVI/AHD/CVI/CVBS
- Up to 20 m
- 12 VDC $\pm$ 25%
- Metal
- IP67

139
⌂**DS-2CE12HFT-F**

- 5 MP CMOS
- 3.6 mm fixed lens
- Up to 40 m
- 0.0005 Lux
- BLC, HLC
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Metal
- IP67



68



DS-2CE76H0T-ITPFS

- 5 MP CMOS
- 2.8 mm, Fixed Lens
- Up to 20 m
- 0.01 Lux
- Digital WDR
- TVI/AHD/CVI/CVBS
- Power Supply 12 VDC $\pm$ 25%
- Plastic
- IP67



165



DS-2CE79H0T-IT3ZE

- 5 MP CMOS
- 2.7 mm to 13.5 mm varifocal lens
- 0.01 Lux
- BLC;HLC;Global;DWDR
- TVI/AHD/CVI/CVBS
- Up to 40 m
- 12 VDC $\pm$ 15% Plastic
- Metal
- IP67



174



DS-2CE5AH0T-VPIT3ZE

- 5 MP CMOS
- 2.7 mm to 13.5 mm varifocal lens
- Up to 40m
- 0.01 Lux
- BLC;HLC;Global;DWDR
- 12 VDC $\pm$ 25%
- Metal
- IP67



325



DS-2CC52H1T-FITS

- 5 MP CMOS
- 1.1 mm, Fixed Lens
- Up to 20m
- 0.01 Lux
- 12 VDC $\pm$ 15%



143
M

DS-2CE72HFT-F28

- 5 MP CMOS
- 0.0005 Lux
- 2.8 mm fixed lens
- STD/HIGH-SAT
- TVI/AHD/CVI/CVBS
- 12 VDC $\pm$ 25%
- Up to 20 m
- Metal
- IP67

DVR



HIKVISION

NEW



171



DS-E04HGHI-B

- 4 port
- Powered by eSSD technology
- Up to 1080p\Lite@30 fps encoding capability
- Audio via coaxial cable
- H.265 Pro/H.265
- @25 fps (P)/30 fps (N)
- 1080p Lite/720p/720p Lite
- 1080p Lite/720p is 15 fps by default
- Built-in 330 GB eSSD

NEW



212



DS-E08HGHI-B

- 8 port
- Powered by eSSD technology
- Up to 1080p\Lite@30 fps encoding capability
- Audio via coaxial cable
- H.265 Pro/H.265
- @25 fps (P)/30 fps (N)
- 1080p Lite/720p/720p Lite
- 1080p Lite/720p is 15 fps by default
- Built-in 512 GB eSSD

90



DS-7104HGHI-K1

- 4 port
- 1 mp
- Max. 1200 m for 720p HDTVI signal
- Up to 1080p Lite@15 fps encoding capability
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- Up to 4 TB

126



DS-7104HQHI-K1

- 4 port
- 2 mp
- Encoding ability up to 1080p @ 15 fps
- 4-ch via coaxial cable
- Efficient H.265 pro+ compression technology
- HDTVI/AHD/CVI/CVBS/IP
- Up to 6 TB



124



IDS-7104HQHI-M1/S

- 4 port
- 2 mp
- Encoding ability up to 1080p @ 15 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- Up to 10 TB



208



DS-7108HQHI-K1

- 8 port
- 2 mp
- Encoding ability up to 1080p @ 15 fps
- 8-ch via coaxial cable
- Efficient H.265 pro+
- HDTVI/AHD/CVI/CVBS/IP
- Up to 6 TB



202



DS-7116HGHI-K1

- 16 port
- 1 mp
- Max. 1200 m for 720p HDTVI signal
- Up to 1080p
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- Up to 10 TB



322



iDS-7116HQHI-M1/S

- 16 port
- 2 mp
- up to 1080p @ 15 fps
- 16-ch via coaxial cable
- Efficient H.265 pro+
- HDTVI/AHD/CVI/CVBS/IP
- Up to 10 TB



162



DS-7204HQHI-K1 4 AUDIO

- 4 port
- Up to 1080p\@15 fps
- Audio via coaxial cable
- H.265 Pro/H.265
- Max. 6-ch IP cameras input (up to 6 MP)
- H.265 Pro+
- HDTVI/AHD/CVI/CVBS/IP
- 1 SATA interface
- Up to 10 TB



160



IDS-7204HQHI-M1/S

- 4 port
- Encoding ability up to 1080p @ 15 fps
- Up to 1080p\Lite@30 fps encoding capability
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Human/Vehicle AnalysisUp to 2-ch
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 1 SATA interface
- Up to 10 TB capacity for each disk



236



IDS-7204HUHI-M1/S

- 4 port
- Face picture detection, face picture search
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Up to 5 MP(2560 × 1944)@20 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- Up to 8-ch IP camera inputs (up to 8 MP)
- HDTVI/AHD/CVI/CVBS/IP
- 1 SATA interface
- Up to 10 TB



340



DS-7204HTHI-K1

- 4 port
- Up to 8 MP resolution
- 4-ch via coaxial cable
- Up to 8 network cameras can be connected
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 1 SATA interface
- Up to 10 TB



231



IDS-7208HQHI-M1/S

- 8 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search
- Up to 1080p@30 fps
- 8-ch via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 1 SATA interface
- Up to 10 TB



272



IDS-7208HQHI-M2/S

- 8 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search
- Up to 1080p@30 fps
- 8-ch via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 2 SATA interface
- Up to 10 TB



378



IDS-7208HUHI-M2/S

- 8 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search
- Up to 5 MP(2560 × 1944)@20 fps
- 8-ch via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 2 SATA interface
- Up to 10 TB



590



DS-7208HTHI-K2

- 8 port
- 2 mp
- Up to 8 MP 30fps
- 8-ch via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 2 SATA interface
- Up to 10 TB



404



IDS-7216HQHI-M1/S

- 16 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search capability
- Up to 1080p@25 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTV/ AHD/ CVI/ CVBS/ IP
- 1 SATA interface
- Up to 10 TB



437



IDS-7216HQHI-M2/S

- 16 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search capability
- Up to 1080p@25 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTV/ AHD/ CVI/ CVBS/ IP
- 1 SATA interface
- Up to 10 TB



454



IDS-7216HQHI-M2/S 16 Audio

- 16 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search capability
- Up to 1080p@25 fps
- 16-ch via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTV/ AHD/ CVI/ CVBS/ IP
- 1 SATA interface
- Up to 10 TB



726



IDS-7216HUHI-M2/S

- 16 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search capability
- Up to 5 MP(2560 × 1944)@20 fps
- 16-ch via coaxial cable
- HDTV/ AHD/ CVI/ CVBS/ IP
- H.265 Pro+/H.265 Pro/H.265
- 2 SATA interfaces
- Up to 10 TB



751
M

iDS-7232HQHI-M2/S

- 32 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Face picture detection, face picture search
- Up to 1080p@30 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 2 SATA interfaces
- Up to 10 TB



1350
M

iDS-7332HQHI-M4/S

- 32 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Up to 1080p @ 30 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 4 SATA interfaces
- Up to 12 TB



1990
M

iDS-7332HUHI-M4/S

- 8 port
- Süni İntelekt əsasında insan və avtomobil vasitələrin aşkarlanması
- Up to 5mp @ 30 fps
- Audio via coaxial cable
- H.265 Pro+/H.265 Pro/H.265
- HDTVI/AHD/CVI/CVBS/IP
- 4 SATA interfaces
- Up to 12 TB

IP *Sistemi*



HIKVISION



90



DS-2CD1023G0E-I

- 2 MP CMOS
- 2.8 mm, 4 mm, fixed lens
- 1/2.7" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- 12 VDC $\pm$ 25%, 0.4 A, max. 5 W,
- Up to 30 m
- Metal & Plastic
- H.265+
- IP67



118



DS-2CD1023G0-IUF

- 2 MP CMOS
- 2.8 mm, fixed lens
- 0.028 Lux
- BLC, 3D DNR Digital WDR
- Daxili Mikrofon
- Digital WDR
- Up to 30 m
- 12 VDC: 0.4 A, max. 5 W
- Metal & Plastic
- IP66



132



DS-2CD1T23G0-I

- 2 MP
- 1/2.8" Progressive Scan CMOS
- 4 mm, fixed lens
- 0.028 Lux
- BLC, HLC, 3D DNR
- 12 VDC $\pm$ 25%, PoE: 802.3af
- Up to 50 m
- IP67



223



DS-2CD1623G2-IZ

- 2 MP
- Varifocal lens 2.8 to 12 mm
- 0.005 Lux
- SD Kart Yuvası (256 GB-dək)
- BLC, HLC, 3D DNR
- 12 VDC $\pm$ 25%
- Up to 50 m
- Metal
- IP67



140

**DS-2CD1027G2-L**

- 2 MP
- 1/2.8" Progressive Scan CMOS
- 2.8 mm, fixed lens
- 0.001 Lux
- BLC,HLC,3D DNR
- 12 VDC $\pm$ 25%, 0.5 A, max. 6
- Up to 30 m
- Aluminum alloy body
- IP67



113

**DS-2CD1023G2-LIU**

- 2 MP
- 1/2.9" Progressive Scan CMOS
- 0.005 Lux
- Smart Hybrid Light
- Daxili mikrofon
- BLC,HLC,3D DNR
- 12 VDC $\pm$ 25%
- Up to 30 m
- Metal & Plastic
- IP67



139

**DS-2CD1T23G2-LIU**

- 2 MP
- 1/2.9" Progressive Scan CMOS
- 4 mm, fixed lens
- 0.005 Lux
- Smart Hybrid Light
- BLC, HLC, 3D DNR
- SD Kart Yuvası(512 GB-dək)
- Up to 50 m
- IP67



102



DS-2CD1123G0E-I

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/2.7" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- 12 VDC $\pm$ 25%
- Up to 30 m
- Metal & Plastic
- IP67



90



DS-2CD1323G0E-I

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/2.7" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- 12 VDC $\pm$ 25%
- Up to 30 m
- Metal & Plastic
- IP67



110



DS-2CD1323G2-IUF

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/2.7" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Daxili Mikrofon
- SD Kart Yuvası(256 GB-dək)
- Up to 30 m
- Metal & Plastic
- IP67



241



DS-2CD1H23G2-IZ

- 2 MP CMOS
- Varifocal lens 2.8 to 12 mm
- 1/2.7" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- SD Kart Yuvası(256 GB-dək)
- Up to 30 m
- Metal & Plastic
- IP67



152

**DS-2CD1327G2-LUF**

- 2 MP CMOS
- 2.8 mm, Fixed Lens
- Up to 30 m
- 0.001 Lux
- 1/2.8" Progressive Scan CMOS
- BLC,HLC,3D DNR
- Daxili Mikrofon
- SD kart Yuvası(256 GB-dək)
- Plastic
- IP67



110

**DS-2CD1123G2-IUF**

- 2 MP CMOS
- 2.8 mm, Fixed Lens
- Up to 30 m
- 0.001 Lux
- 1/2.8" Progressive Scan CMOS
- BLC,HLC,3D DNR
- Daxili Mikrofon
- SD kart Yuvası(256 GB-dək)
- Plastic
- IP67

NEW



113

**DS-2CD1323G2-LIU**

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/2.9" Progressive Scan CMOS
- 0.005 Lux
- Smart Hybrid Light
- Daxili Mikrofon
- SD Kart Yuvası(512 GB-dək)
- Up to 30 m
- Metal & Plastic
- IP67



191



DS-2CD2023G2-I

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/2.8" Progressive Scan CMOS
- 0.005 Lux
- BLC,HLC,3D DNR
- 12 VDC $\pm$ 25%
- Up to 40 m
- Metal
- H.265+
- IP67



212



DS-2CD2023G2-IU

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/2.8" Progressive Scan CMOS
- 0.005 Lux
- Daxili Mikrofon
- BLC,HLC,3D DNR
- 12 VDC $\pm$ 25%
- Up to 40 m
- Metal
- H.265+
- IP67



244



DS-2CD2T26G2-2I

- 2 MP
- 1/2.8" Progressive Scan CMOS
- SD Kart Yuvası (256 GB-dək)
- 4 mm, fixed lens
- 0.002 Lux
- BLC,HLC,3D DNR
- 12 VDC $\pm$ 25%
- Up to 60m
- IP67



245



DS-2CD2T26G2-4I

- 2 MP
- 1/2.8" Progressive Scan CMOS
- 0.002 Lux
- SD Kart Yuvası (256 GB-dək)
- BLC,HLC,3D DNR
- 12 VDC $\pm$ 25%
- Up to 80 m
- Metal
- IP67



381
M

DS-2CD2623G2-IZS

- 2 MP CMOS
- 1/2.8" Progressive Scan CMOS
- 0.01 Lux
- BLC;HLC;Global;DWDR
- Up to 60m
- 12 VDC $\pm$ 15%Plastic
- Metal
- IP67



216

**DS-2CD2027G2-L**

- 2 MP CMOS
- 2.8 mm, 4 mm, fixed lens
- 1/2.7" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası(512 GB-dək)
- Up to 40m
- H.265+
- IP67



305

**DS-2CD2T27G2-L**

- 2 MP CMOS
- 4 mm, fixed lens
- 1/2.8" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- Up to 60 m
- SD Kart Yuvası(256 GB-dək)
- Metal
- IP66



148
M

DS-2CD2421G0-IW

- 2MP
- 2.00 mm, Fixed Lens
- 1/2.7" Progressive Scan CMOS
- 0.001 Lux
- BLC, 3D DNR
- Up to 10 m
- Wireless Range-IW: Up to 50 m
- Plastik



208
M

DS-2CD2D25G1 M-D

- 2 MP CMOS
- 2.8 mm fixed lens
- 0.002 Lux
- 1/2.8" Progressive Scan CMOS
- BLC, HLC, defog, 3D DNR
- 12 VDC $\pm$ 20%
- H.265+



227
M

DS-2CD2123G2-IU

- 2MP
- Fixed focal lens, 2.8 mm
- 1/2.8" Progressive Scan CMOS
- SD Kart Yuvası(256 GB-dək)
- 0.005 Lux
- Up to 30 m
- Daxili Mikrofon
- H.265+
- BLC,HLC,3D DNR
- IP67



212
M

DS-2CD2123G2-IS

- 2MP
- Fixed focal lens, 2.8 mm
- 1/2.8" Progressive Scan CMOS
- SD Kart Yuvası(256 GB-dək)
- 0.005 Lux
- Up to 30 m
- Mikrofon əlavə etmə imkanı
- H.265+
- BLC,HLC,3D DNR
- IP67



375



DS-2CD2H23G2-IZS

- 2 MP
- 1/2.8" Progressive Scan CMOS
- Varifocal lens, 2.8 to 12 mm
- 1/2.8" Progressive Scan CMOS
- 0.005 Lux
- SD Kart Yuvası(256 GB-dək)
- Mikrofon Əlavə Etmə imkanı
- BLC, HLC, 3D DNR
- Up to 40 m
- H.265+
- IP67



319

**DS-2CD2821G0**

- 2 MP CMOS
- 1/2.7" Progressive Scan CMOS
- 0.005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası(256 GB-dək)
- Up to 40 m
- Metal
- H.265+
- IP67



18.7

**DS-1293ZJ**

289

**HV3816P-8MPIR**



DS-2CD2327G2-LU

- 2MP
- 1/2.8" Progressive Scan CMOS
- Up to 30 m
- 0.0005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası(256 GB-dək)
- Daxili Mikrofon
- H.265+
- IP67



114
m

DS-2CD1043G2-I

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Up to 30 m
- 12 VDC $\pm$ 25%
- H.265+
- IP67



138
m

DS-2CD1043G2-IUF

- 4 MP CMOS
- 2.8 mm fixed lens
- 1/3" progressive scan CMOS
- 0.01 Lux
- Up to 30 m
- BLC, 3D DNR
- SD Kart Yuvası (256GB-dək)
- Daxili Mikrofon
- H.265+
- IP67



160
m

DS-2CD1T43G2-I

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Up to 50 m
- 12 VDC $\pm$ 25%
- H.265+
- IP67



266
m

DS-2CD1643G0-IZ

- 4MP
- Varifocal lens 2.8 to 12 mm
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Up to 50 m
- SD Kart Yuvası (256GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



171



DS-2CD1047G2-L

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.001 Lux
- BLC, 3D DNR
- Up to 30 m
- SD Kart Yuvası (256GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



145.5



DS-2CD1043G2-LIU

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- Hybrid Light
- Daxili mikrofon
- BLC, 3D DNR
- Up to 30 m
- SD Kart Yuvası (512GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



169



DS-2CD1T43G2-LIUF

- 4MP
- 4 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- Smart Hybrid Light
- Daxili mikrofon
- Up to 50 m
- SD Kart Yuvası (512 GB-dək)
- Metal & Plastic
- H.265+
- IP67



119

**DS-2CD1143G2-I**

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Up to 30 m
- 12 VDC $\pm$ 25%
- H.265+
- IP67



118

**DS-2CD1343G2-I**

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Up to 30 m
- 12 VDC $\pm$ 25%
- H.265+
- IP67



258

**DS-2CD1H43G0-IZ**

- 4MP
- Varifocal Lens, 2.8 to 12 mm
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- BLC, 3D DNR
- Up to 30 m
- SD Kart Yuvası (256GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



158.5

**DS-2CD1343G2-LIU**

- 4MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- Smart Hybrid Light
- Daxili Mikrofon
- Up to 30 m
- SD Kart Yuvası (512GB-dək)
- H.265+
- IP67



215



DS-2CD2043G2-I

- 4MP
- 2.8 mm, fixed lens
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- BLC, HLC, 3D DNR
- Up to 40 m
- SD Kart Yuvası (256GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



235



DS-2CD2043G2-IU

- 4MP
- 2.8 mm, fixed lens
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- BLC, HLC, 3D DNR
- Up to 40 m
- SD Kart Yuvası (256GB-dək)
- Daxili Mikrofon
- 12 VDC $\pm$ 25%
- H.265+
- IP67



260



Powered by

DarkFighter

DS-2CD2T46G2-2I

- 4MP
- 4 mm, fixed lens
- 1/3" Progressive Scan CMOS
- 0.003 Lux
- BLC, HLC, 3D DNR
- Up to 60 m
- SD Kart Yuvası (512GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



275



Powered by

DarkFighter

DS-2CD2T46G2-4I

- 4MP
- 4 mm, fixed lens
- 1/3" Progressive Scan CMOS
- 0.003 Lux
- BLC, HLC, 3D DNR
- Up to 80 m
- SD Kart Yuvası (512GB-dək)
- 12 VDC $\pm$ 25%
- H.265+
- IP67



297



DS-2CD2T45G0P-I

- 4MP
- 1/2.7" Progressive Scan CMOS
- 0.028 Lux
- 1.68 mm fixed lens
- BLC;HLC;EIS;3D DNR
- Up to 20 m
- SD Kart Yuvası (256GB-dək)
- Metal
- IP67



305



Powered by

DarkFighter

DS-2CD2T46G2-ISU/SL

- 4 MP CMOS
- 2.8 mm fixed lens
- 0.003 Lux
- 1/3" Progressive Scan CMOS
- BLC, HLC, 3D DNR
- Up to 60 m
- SD Kart Yuvası (512GB-dək)
- Daxili iki tərəfli audio
- Həyəcan Signalı
- IP67



395



AcuSense

DS-2CD2643G2-IZS

- 4 MP CMOS
- Varifocal lens 2.8 to 12 mm
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- SD Kart Yuvası (512GB-dək)
- BLC, HLC, 3D DNR
- Up to 60
- H.265+
- IP67



305



Powered by

DarkFighter

DS-2CD2T46G2-ISU/SL

- 4MP
- Fixed focal lens, 4 mm
- 1/3" Progressive Scan CMOS
- 0.003 Lux
- Up to 60 m
- SD Kart Yuvası (512GB-dək)
- BLC, HLC, 3D DNR
- Daxili iki tərəfli audio
- Həyəcan Signalı
- IP67



252

**DS-2CD2047G2-L**

- 4MP CMOS
- 2.8mm, 4mm, fixed lens
- 1/1.8" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası (512GB-dək)
- Up to 30 m
- Metal & Plastic
- IP67



299

**DS-2CD2047G2-LU/SL**

- 2 MP CMOS
- 2.8 mm, fixed lens
- 1/1.8" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası (512GB-dək)
- Up to 40 m
- Daxili iki tərəfli audio
- Həyəcan Signalı
- IP67



370

**DS-2CD2T47G2-L**

- 4 MP CMOS
- 4 mm, fixed lens
- 1/1.8" Progressive Scan CMOS
- 00.0005 Lux
- BLC, HLC, 3D DNR
- H.265+
- SD Kart Yuvası(512 GB-dək)
- Up to 60 m
- IP67



397

**DS-2CD2T47G2-LSU/SL**

- 4 MP CMOS
- 4 mm, fixed lens
- 1/2.7" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- Daxili iki tərəfli audio
- Həyəcan Signalı
- SD Kart Yuvası(512 GB-dək)
- Up to 60 m
- IP67



DS-2CD2047G2H-LI EF

- 4MP
- 2.8\ 4MM mm, fixed lens
- 1/1.8" Progressive Scan CMOS
- Focus on human and vehicle classification
- 0.0005 Lux
- BLC, HLC, 3D DNR
- Smart Hybrid Light
- SD Kart Yuvası (512GB-dək)
- Up to 40 m
- Metal
- IP67



190



DS-2CD2443G0-IW

- 4 MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.01 Lux
- SD Kart Yuvası(128 GB-dək)
- BLC/3D DNR/HLC
- İnsan Aşkarlama
- Up to 10 m
- H.265+



239



DS-2CD2143G2-IU

- 4 MP
- 2.8 mm, Fixed Lens
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- Daxili Mikrofon
- SD Kart Yuvası(256 GB-dək)
- BLC, HLC, 3D DNR
- Up to 30 m
- H.265+
- IP67



239



DS-2CD2143G2-IU

- 4 MP CMOS
- 2.8 mm fixed lens
- 0.005 Lux
- 1/3" Progressive Scan CMOS
- SD Kart Yuvası(256 GB-dək)
- BLC, HLC, 3D DNR
- Up to 30 m
- H.265+
- IP67



255



DS-2CD2345G0P-I

- 4 MP
- Fixed focal lens, 1.66 mm
- 1/2.7" Progressive Scan CMOS
- Ultra Geniş Baxış Bucağı 180°
- SD Kart Yuvası(256 GB-dək)
- BLC, HLC, 3D DNR
- Up to 10 m
- H.265+
- IP67



415



DS-2CD2H43G2-IZS

- 4MP CMOS
- Varifocal lens, 2.8 to 12 mm
- 1/3" Progressive Scan CMOS
- 0.005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası (256GB-dək)
- Up to 40 m
- Aluminum alloy body
- IP67



255



DS-2CD2346G2-ISU\SL

- 4MP CMOS
- Fix lens, 2.8
- 1/3" Progressive Scan CMOS
- 0.003 Lux
- İki tərəfli səs
- Səsli işıqlı heyacan signalı
- BLC, HLC, 3D DNR
- SD Kart Yuvası (512GB-dək)
- Up to 30 m
- Aluminum alloy body
- IP67



255



DS-2CD2543G2-IS

- 4 MP CMOS
- 2.8 mm fixed lens
- 0.005 Lux
- 1/3" Progressive Scan CMOS
- Mikrofon əlavə etmə imkanı
- SD Kart Yuvası (512 GB-dək)
- BLC, HLC, 3D DNR
- Up to 30 m
- H.265+
- IP67

NEW



325



DS-2CD2347G2-LU

- 4 MP CMOS
- 2.8 mm fixed lens
- 24/7 colorful imaging
- 0.0005 Lux
- 1/1.8" Progressive Scan CMOS
- Daxili mikrofon
- SD Kart Yuvası (512 GB-dək)
- Focus on human and vehicle targets classification based on deep learning
- Up to 30 m
- H.265+



Gözlənilir

**DS-2CD2063G2-I**

- 6 MP
- 2.8 mm, Fixed Lens
- 1/2.9" Progressive Scan CMOS
- 0.01 Lux
- SD Kart Yuvası(128 GB-dək)
- BLC/3D DNR/HLC
- Up to 30 m
- H.265+
- IP67



260

**DS-2CD2T63G2-4I**

- 6 MP
- 4 mm, Fixed Lens
- 1/2.4" Progressive Scan CMOS
- 0.005 Lux
- SD Kart Yuvası(512 GB-dək)
- BLC, HLC, 3D DNR
- Up to 80 m
- H.265+
- IP67

NEW



375

**DS-2CD2067G2H-LI EF**

- 6 MP CMOS
- 2.8 \ 4 mm fixed lens
- 0.0005 Lux
- 1/1.8" Progressive Scan CMOS
- ColorVu Strobe Light
- SD Kart Yuvası(512 GB-dək)
- BLC, HLC, 3D DNR
- Up to 30 m
- H.265+
- IP67

NEW



375

**DS-2CD2667G2HT-LIZS**

- 6 MP CMOS
- 2.8 -12mm fixed lens
- 0.0028 Lux
- 1/1.8" Progressive Scan CMOS
- Smart Hybrid Light
- ColorVu Strobe Light
- SD Kart Yuvası(512 GB-dək)
- Mikrofon əlavə etmək imkanı
- Up to 30 m
- H.265+
- IP67



Model
yenilenməsi
gözlənilir

DS-2CD2463G0-IW

- 6 MP
- 2.8 mm, Fixed Lens
- 1/2,9" Progressive Scan CMOS
- 0.01 Lux
- SD Kart Yuvası(128 GB-dək)
- BLC/3D DNR/HLC
- İnsan Aşkarlama
- Up to 10 m
- H.265+
- Plastik



280

DS-2CD2366G2-IU

- 6 MP CMOS
- 2.8 mm, fixed lens
- 1/2.4" Progressive Scan CMOS
- 0.003 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası (512GB-dək)
- Daxili Mikrofon
- IP67

NEW



375

DS-2CD2H66G2-IZS

- 6 MP CMOS
- 2.8 -12 mm fixed lens
- 0.003 Lux
- 1/2.4" Progressive Scan CMOS
- SD Kart Yuvası(512 GB-dək)
- Mikrofon əlavə etmə imkanı
- Focus on human and vehicle targets classification based on deep learning
- Up to 30 m
- H.265+
- IP67



296
m

DS-2CD2083G2-I

- 8 MP
- 2.8 mm, Fixed Lens
- 1/2.8" Progressive Scan CMOS
- 0.005 Lux
- SD Kart Yuvası(512 GB-dək)
- BLC/3D DNR/HLC
- İnsin və nəqliyyat vasitələrinin təsnifatı
- Up to 40 m
- H.265+
- IP67



371
m

DS-2CD2T86G2-2I

- 8 MP
- 4 mm, Fixed Lens
- 1/1.8" Progressive Scan CMOS
- 0.003 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası(256 GB-dək)
- İnsin və nəqliyyat vasitələrinin təsnifatı
- Up to 60 m
- H.265+
- IP67



576



DS-2CD2T87G2-L

- 8 MP CMOS
- 2.8mm, 4mm, fixed lens
- 1/1.2" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- SD Kart Yuvası (256 GB-dək)
- Up to 60 m
- Metal & Plastic
- H.265+
- IP67

Sorğu
Əsasında

DS-2CD2T87G2P-LSU/SL

- 8 MP CMOS
- 4 mm, fixed lens
- 1/1.8" Progressive Scan CMOS
- 0.0005 Lux
- 180° Əhatə Dairəsi
- SD Kart Yuvası (512 GB-dək)
- İnsan və nəqliyyat vasitələrinin təsnifatı
- Up to 40 m
- Daxili audio
- H.265+
- IP67

Sorğu
Əsasında

DS-2CD2087G2-L

- 8 MP CMOS
- 2.8 mm, fixed lens
- 1/1.2" Progressive Scan CMOS
- 0.0005 Lux
- BLC, HLC, 3D DNR
- H.265+
- SD Kart Yuvası(256 GB-dək)
- Up to 40 m
- IP67



493



DS-2CD2087G2H-LI EF

- 8 MP CMOS
- 2.8 \ 4 mm, fixed lens
- 1/1.2" Progressive Scan CMOS
- Smart Hybrid Light
- Focus on human and vehicle classification based on deep learnin
- SD Kart Yuvası(256 GB-dək)
- Up to 40 m
- IP67



DS-2CD2386G2-IU

- 8 MP
- 2.8 mm, Fixed Lens
- 1/1.8" Progressive Scan CMOS
- 0.003 Lux
- SD Kart Yuvası(256 GB-dək)
- BLC/3D DNR/HLC
- Up to 30 m
- H.265+
- IP67

PTZ *kamera*



HIKVISION



608



Powered by

DarkFighter

DS-2AE4225TI-D

- **Analog PTZ**
- 2MP
- 1/2.8" Progressive Scan CMOS
- 0.005 Lux
- 25× optical, 16 × digital
- TVI/AHD/CVI/CVBS
- Up to 100 m
- H.265+
- IP66

- 2 MP CMOS
- 1/2.8" progressive scan CMOS
- 0.005 Lux
- Support face capture
- 25 × optical, 16 × digital
- Üfüqi baxış sahəsi: 57,6°
- Şaquli baxış sahəsi: 34,4°
- Digital defog
- BLC, HLC, 3D DNR
- Up to 100 m
- IP66

720
m



Powered by
DarkFighter +

DS-2DE4225IW-DE T5

- 2MP
- 1/2.8" Progressive Scan CMOS
- 0.005Lux
- Support face capture
- İnsin və nəqliyyat vasitələrinin təsnifatı
- 32 × optical, 16 × digital
- Üfüqi baxış sahəsi: 58.4°
- Şaquli baxış sahəsi: 33.8°
- WDR, HLC, BLC, 3D DNR
- SD Kard Yuvası (256 GB)
- Up to 150 m
- H.265+
- IP66

710
m




DS-2DE4225IW-DE S6



DS-2DE5232IW-AE S6/S5

- 2 MP CMOS
- 1/2.8" Progressive Scan CMOS
- 0.005 Lux
- Support face capture
- 32 × optical, 16 × digital
- Üfüqi baxış sahəsi: 58.9°
- Şaquli baxış sahəsi: 33.5°
- Digital defog
- BLC, HLC, 3D DNR
- Up to 150m
- IP66

- 4MP
- 0.005 Lux
- 1/2.8" progressive scan CMOS
- 25× optical zoom\16× digital zoom
- İnsin və nəqliyyat vasitələrinin təsnifat
- Support face capture
- up to 100 m
- BLC, HLC, 3D DNR
- Up to 100 m
- H.265+/H.265
- IP66

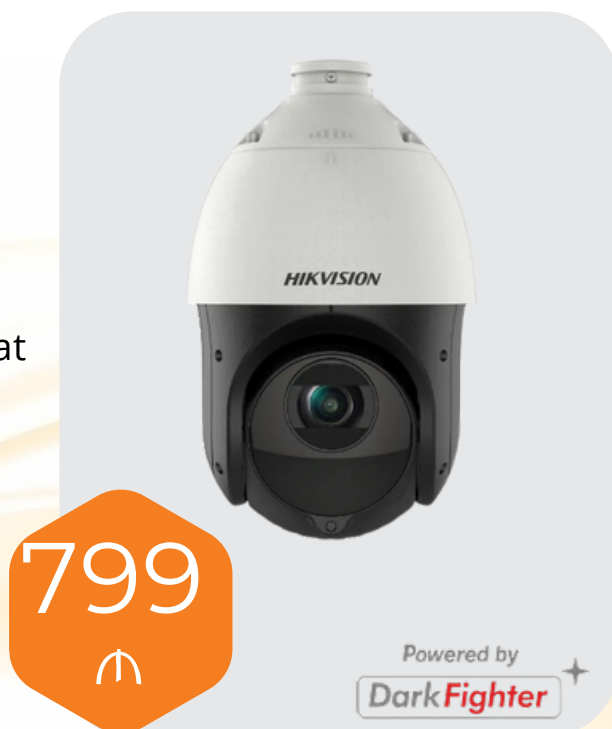

DS-2DE4425IW-DE T5



DS-2DE7A432IW-AEB(T5)

- 4 MP CMOS
- 1/2.8" progressive scan CMOS
- 0.005 Lux
- Up to 200 m
- 32 × optical, 16 × digital
- Üfüqi baxış sahəsi: 57,6°
- Şaquli baxış sahəsi: 34,4°
- Audio visual alarm
- Focuses on human and vehicle targets classification
- Digital defog
- BLC, HLC, 3D DNR
- IP66



DS-2DE3A400BW-DE

- 4 MP
- 1/2.8" progressive scan CMOS
- 0.0005 Lux
- Üfüqi baxış sahəsi: 88.7°
- Şaquli baxış sahəsi: 46.5°
- 16 × digital
- 24/7 colorful
- SD kart Yuvası (256 GB-dək)
- BLC, HLC, 3D DNR
- Up to 50 m
- H.265+
- IP66

Tandem Vu *kamera*



HIKVISION



DS-2SE4C225MWG-E/12

- 2 MP CMOS
- Eyni zamanda geniş ərazini və kiçik detalları çəkir
- 25 × optical, 16 × digital
- 1/2.8" Progressive Scan CMOS
- [Bullet]: 0.0005 Lux
- [PTZ]: 0.005 Lux
- Pan: 360°
- Tilt: 105°
- [Bullet]: Up to 30 m
- [PTZ]: Up to 100 m
- Digital defog
- BLC, HLC, 3D DNR
- IP66



DS-2SE4C225MWG-E/26

- 2 MP CMOS
- Eyni zamanda geniş ərazini və kiçik detalları çəkir
- 25 × optical, 16 × digital
- 1/2.8" Progressive Scan CMOS
- [Bullet]: 0.0005 Lux
- [PTZ]: 0.005 Lux
- Pan: 360°
- Tilt: 105°
- [Bullet]: Up to 30 m
- [PTZ]: Up to 100 m
- Digital defog
- BLC, HLC, 3D DNR
- IP66

- 2 MP
- 0.005 Lux
- 1/2.8" progressive scan CMOS
- 32× optical zoom\16× digital zoom
- Pan: 240°
- Tilt: 200°
- up to 200 m
- Defog
- ANR;Dual-VCA
- Manual tracking;event tracking
- BLC, HLC, 3D DNR
- Up to 100 m
- H.265+/H.265
- IP66



1653

**DS-2SE7C124IW-AE**

- 4 MP
- 0.005 Lux
- 1/2.8" progressive scan CMOS
- 25× optical zoom\16× digital zoom
- Pan: 240°
- Tilt: 200°
- PTZ: up to 200 m
- Bullet: up to 30 m
- Defog
- SD Kart Yuvası(256 GB-dək)
- ANR;Dual-VCA
- Manual tracking, auto tracking, tracking takeover, track in turn
- WDR, HLC, BLC, 3D DNR,
- H.265+/H.265



1399

**DS-2SE7C425MW-AEB(14F1)(P3)**



1699



DS-2SE7C432MW-AEB(14F1)(P3)

- 4 MP
- 0.005 Lux
- 1/2.8" progressive scan CMOS
- 32× optical zoom\16× digital zoom
- Pan: 240°
- Tilt: 200°
- PTZ: up to 200 m
- Bullet: up to 30 m
- Defog
- SD Kart Yuvası(256 GB-dək)
- ANR;Dual-VCA
- Manual tracking, auto tracking, tracking takeover, track in turn
- WDR, HLC, BLC, 3D DNR,
- H.265+/H.265



3990



DS-2SF8C442MXS-DLW(24F0)(P3)

- 4 MP
- 0.005 Lux
- 1/2.8" progressive scan CMOS
- 42× optical zoom\16× digital zoom
- Pan: 240°
- Tilt: 200°
- PTZ: up to 300 m
- Bullet: up to 30 m
- Defog
- SD Kart Yuvası(256 GB-dək)
- ANR;Dual-VCA
- Manual tracking, auto tracking, tracking takeover, track in turn
- WDR, HLC, BLC, 3D DNR,
- H.265+/H.265

NVR



HIKVISION



105



DS-7104NI-Q1

- 4 port
- Up to 6 MP resolution
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 1 SATA interface
- Up to 6TB



171



DS-7104NI-Q1/4P

- 4 port
- Up to 6 MP resolution
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 1 SATA interface
- Up to 6TB
- 4 PoE NVR



300



DS-7604NI-K1 /4P

- 4 port
- Up to 4-ch @ 1080p decoding capacity
- 4 PoE interfaces
- H.265 Pro+/H.265 Pro/H.265
- 1 SATA interface for 1HDD
- Up to 6 TB



599



DS-7604NI-K1/4P/4G

- 4 port
- 4G wireless network
- 4 PoE interfaces
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- H.265/H.265+/H.264/H.264+
- 4 PoE interfaces
- Up to 8 TB



128
⌒

DS-7108NI-Q1

- 8 port
- Up to 1080p @ 30 fps
- Up to 4 MP resolution
- H.265 Pro+/H.265 Pro/H.265
- 1 SATA interface for 1HDD
- Up to 6 TB



247
⌒

DS-7108NI-Q1/8P

- 8 port
- Up to 1080p @ 30 fps
- 8 PoE interfaces
- Up to 4 MP resolution
- H.265 Pro+/H.265 Pro/H.265
- 1 SATA interface for 1HDD
- Up to 6 TB



233
⌒

DS-7608NI-K1

- 8 port
- Up to 1-ch@8 MP/3-ch@4 MP/6-ch@1080p decoding capacity
- Up to 1080p @ 30fps
- 1 SATA interface
- Up to 8 TB



267
⌒

DS-7608NI-K2

- 8 port
- Up to 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- □ H.265+/H.265/H.264+/H.264
- Up to 1080p @ 30fps
- 2 SATA interfaces
- Up to 10 TB



440



DS-7608NI-I2

- 8 port
- Up to 12 MP resolution
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 1080p @30 fps
- Supports various special function cameras, including thermal camera /fisheye/people counting/heatmap/ANPR
- H.265+/H.265/ H.264+/H.264
- 2 SATA interface
- Up to 10TB



465



DS-7608NI-K2/8P

- 4 port
- Up to 6 MP resolution
- Up to 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 2 SATA interface
- Up to 6TB
- 8 PoE NVR



165
⌞

DS-7116NI-Q1/M

- 16 port
- Up to 1080p @ 30 fps
- Up to 4 MP resolution
- H.265 Pro+/H.265 Pro/H.265
- 1 SATA interface for 1HDD
- Up to 6 TB



305
⌞

DS-7616NI-K2

- 16 port
- Up to 1080p @ 25 fps
- Up to 8 MP resolution
- H.265 Pro+/H.265 Pro/H.265
- 2 SATA interface for 1HDD
- Up to 10 TB



499
⌞

DS-7616NI-Q2/16P


- 16 port
- Up to 1-ch @ 8MP or 5-ch @ 1080P decoding capacity
- Up to 1080p @ 30fps
- H.265+/H.265/H.264+/H.264
- 1 SATA interface
- Up to 8 TB
- 16 PoE NVR



564
⌞

DS-7716NI-K4

- 16 port
- Up to 2-ch @ 8MP or 4-ch @ 4MP or 8-ch @ 1080P decoding capacity
- H.265+/H.265/H.264+/H.264
- Up to 1080p @ 30fps
- 4 SATA interfaces
- Up to 10 TB



871



DS-7716NI-I4 B

- 16 port
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 12 MP resolution
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 4 SATA interface
- Up to 10TB



645
M

DS-7732NI-K4

- 32 port
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 12 MP resolution
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 4 SATA interface
- Up to 10TB



599
M

DS-7632NI-K2

- 32 port
- Up to 1-ch @ 8MP or 5-ch @ 1080P decoding capacity
- Up to 1080p @ 30fps
- H.265+/H.265/H.264+/H.264
- 1 SATA interface
- Up to 10 TB



1009
M

DS-7732NI-I4(B)

- 32 port
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 12 MP resolution
- Supports various special function cameras, including thermal camera/fisheye/people counting/heatmap/ANPR
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 4 SATA interface
- Up to 10TB



2262
M

DS-9632NI-I8

- 32 port
- Up to 12 MP high-definition live view, storage and playback
- Up to 12 MP resolution
- Supports some specialist cameras, including people counting camera/ANPR
- Advanced streaming technology enables smooth live view in poor network conditions
- H.265+/H.265/H.264+/H.264
- Up to 1080p @ 30fps
- 8 SATA interfaces
- Up to 10 TB



1047
M

DS-7764NI-I4

- 64 port
- Up to 1-ch@32 MP/2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 12 MP resolution
- Supports various special function cameras, including thermal camera/fisheye/people counting/heatmap/ANPR
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 4 SATA interface
- Up to 10TB



2055
M

DS-8664NI-I8

- 64 port
- Up to 12 MP resolution
- Up to 1080p @30 fps
- 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled.
- H.265+/H.265/ H.264+/H.264
- 8 SATA interface
- Up to 10TB
- RAID 6 MAX,

NEW



2845
M

DS-9664NI-M8

- 64 port
- 2-ch@32 MP (30 fps) + 2-ch@8 MP (30 fps)/10-ch@8 MP (30 fps)/20-ch@4 MP
- Supports- people counting/ANPR/ fisheye
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 8 SATA interfaces support
- Up to 16 TB

NEW



4500
M

DS-9664NI-M16

- 64 port
- 2-ch@32 MP (30 fps) + 2-ch@8 MP (30 fps)/10-ch@8 MP (30 fps)/20-ch@4 MP
- Supports- people counting/ANPR/ fisheye
- Up to 1080p @30 fps
- H.265+/H.265/ H.264+/H.264
- 8 SATA interfaces support
- Up to 16 TB



☎ +994 12 310 18 88

✉ info@abv.az

📍 Ziya Bünyadov pr 43.